

10-10-00

PATENT APPLICATION **A**

ATTORNEY DOCKET NO. 10002221-1

IN THE U.S. PATENT AND TRADEMARK OFFICE
Patent Application Transmittal Letter

ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is a(n): ☒ Utility ☐ Design
☒ original patent application,
☐ continuation-in-part application

INVENTOR(S): Gordon Margulieux

TITLE: Emulation Of Dynamically Reconfigurable Computer System

Enclosed are:

- ☒ The Declaration and Power of Attorney. ☒ signed ☐ unsigned or partially signed
☒ 3 sheets of drawings (one set) ☐ Associate Power of Attorney
☐ Form PTO-1449 ☐ Information Disclosure Statement and Form PTO-1449
☐ Priority document(s) ☐ Other (fee \$)

CLAIMS AS FILED BY OTHER THAN A SMALL ENTITY				
(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) TOTALS
TOTAL CLAIMS	20 — 20	0	X \$18	\$ 0
INDEPENDENT CLAIMS	3 — 3	0	X \$80	\$ 0
ANY MULTIPLE DEPENDENT CLAIMS	0		\$270	\$ 0
BASIC FEE: Design \$320.00 ; Utility% 710)				\$ 710
TOTAL FILING FEE				\$ 710
OTHER FEES				\$
TOTAL CHARGES TO DEPOSIT ACCOUNT				\$ 710

Charge \$ 710 to Deposit Account 08-2025. At any time during the pendency of this application, please charge any fees required or credit any over payment to Deposit Account 08-2025 pursuant to 37 CFR 1.25. Additionally please charge any fees to Deposit Account 08-2025 under 37 CFR 1.16, 1.17, 1.19, 1.20 and 1.21. A duplicate copy of this sheet is enclosed.

"Express Mail" label no. EH862486672US

Date of Deposit Oct. 4, 2000

I hereby certify that this is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.

By Chris Griffin
Typed Name: Chris Griffin

Respectfully submitted,

Gordon Margulieux

By Steven R. Ormiston
Attorney/Agent for Applicant(s)
Reg. No. 35,974
Date: 12/30
Telephone No.: (208) 396-2544

"Express Mail" mailing label number: EH862486672US

Date of Deposit: Oct. 4 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" services under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Typed Name of Person Mailing Paper or Fee: Chris Griffin

Signature: Chris Griffin

PATENT APPLICATION
DOCKET NO. 10002221-1

**EMULATION OF DYNAMICALLY RECONFIGURABLE
COMPUTER SYSTEM**

INVENTOR(S):

Gordon Margulieux

EMULATION OF DYNAMICALLY RECONFIGURABLE COMPUTER SYSTEM

RELATED APPLICATIONS

The present application is related to pending, commonly assigned, and concurrently filed U.S. Patent Application Serial No. [Attorney Docket No. 10002222-1 entitled "PERSISTENT EMULATED DATA STORAGE USING DEDICATED STORAGE IN A TARGET MODE DISK EMULATOR" which is incorporated herein by reference.

TECHNICAL FIELD

The present invention relates in general to peripheral device emulation and in particular to including emulation of control and power circuitry in peripheral device emulation.

BACKGROUND

When constructing data processing or communication equipment, it is generally desirable to emulate the operation of various components and the interaction of these components with each other before all such components are available for actual physical testing. Such emulation generally enables the identification of potential fault conditions to be identified and the exercise of software within host devices designed to identify and respond to fault conditions originating within peripherals or other devices.

Generally, prior art systems are able to emulate data communication between the host and its peripheral devices occurring under steady state conditions. This may be accomplished by connecting data communication wiring or cabling between the host and emulator and causing the host equipment to communicate with the emulating device or emulator. Generally, the emulator is intended to operate, from the vantage point of the host device, just as though it were the device being emulated. The emulator generally emulates operation of a selected device under conditions wherein control signal conditions and power connections to the device being emulated are fixed throughout an emulation session.

FIGURE 1 depicts an apparatus for conducting emulation of a peripheral device according to a prior art solution. Host device or host computer 101 is shown connected to emulator 102 by data connection 103. Any variation in the control settings and power settings of a device being emulated by emulator 102 is generally established by emulator 102 itself.

While the prior art solution may effectively emulate operation of the data connection between host computer 101 and emulator 102, the prior art setup of FIGURE 1 will generally not allow host computer 101 to respond to variations in control settings and power conditions within emulator 102 as host device 101 will generally have no information pertaining to such control settings and power conditions.

Accordingly, the prior art emulation approach eliminates an entire category of testing of apparatus 100. For example, any effects of power-up or power-down operations within

emulator 102 will generally not be discernible to host computer 101. Accordingly, host computer 101 will generally not be able to determine how fault detection and recovery software, which may be present in host computer 101, would respond to such power cycling operations.

5 Accordingly, it is a problem in the art that emulation generally does not enable host devices to determine or measure control settings and power conditions present in an emulator.

10 It is a further problem in the art that if a change in a control setting or power condition for an emulated device causes a disruption in data communication, the host computer will generally not be able to determine a cause of such disruption.

15 It is a further problem in the art that host device fault detection and recovery software will generally not be fully exercised in prior art emulation systems.

SUMMARY OF THE INVENTION

20 The present invention is directed to a system and method which incorporate control and power connections between a host computer or host device and an emulator to more fully exercise the operation of the host device connected to an emulated device. While physical connections may be implemented between the host computer and the emulator to emulate actual power and control data lines between the host computer and a real peripheral device, programs are preferably included in the operation of the emulator to provide an appropriate
25 response to the host device based on a likely response of the device being emulated, as calculated by algorithms included in the emulator software.

30 In a preferred embodiment, deployment of a power data line connection between the host computer and a peripheral may be used to detect the physical presence or absence of a peripheral device at a point of connection to a host device. Use of the power data line connection may be limited to such mere presence detection where the peripheral device being
35 emulated is powered separately from the host computer. However, alternatively, the

emulator may receive data representing power values along a power data line connection, thereby enabling the host device to both control and monitor a level of emulated power transmission to a device being emulated by the emulator.

5 An increasing number of applications, particularly those in high availability computer storage systems employ some form of "hot plug" or dynamic removal and replacement capability for disk drives or other storage systems within a computer system. Such hot plug replacement of system components generally involves connecting and removing disk drives to and from computer systems without powering down the overall computer system. A system for emulating the operation of such a system would preferably include a mechanism for emulating the operation of control and power data lines, as well the effects of abrupt connection and disconnection of power data lines to a data storage device on data communication between a host device and the data storage device or other peripheral device. Preferably, employing the inventive system and method, an emulated peripheral device may be caused to appear and disappear dynamically at selected ports of a host device.

10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500
505
510
515
520
525
530
535
540
545
550
555
560
565
570
575
580
585
590
595
600
605
610
615
620
625
630
635
640
645
650
655
660
665
670
675
680
685
690
695
700
705
710
715
720
725
730
735
740
745
750
755
760
765
770
775
780
785
790
795
800
805
810
815
820
825
830
835
840
845
850
855
860
865
870
875
880
885
890
895
900
905
910
915
920
925
930
935
940
945
950
955
960
965
970
975
980
985
990
995
1000
1005
1010
1015
1020
1025
1030
1035
1040
1045
1050
1055
1060
1065
1070
1075
1080
1085
1090
1095
1100
1105
1110
1115
1120
1125
1130
1135
1140
1145
1150
1155
1160
1165
1170
1175
1180
1185
1190
1195
1200
1205
1210
1215
1220
1225
1230
1235
1240
1245
1250
1255
1260
1265
1270
1275
1280
1285
1290
1295
1300
1305
1310
1315
1320
1325
1330
1335
1340
1345
1350
1355
1360
1365
1370
1375
1380
1385
1390
1395
1400
1405
1410
1415
1420
1425
1430
1435
1440
1445
1450
1455
1460
1465
1470
1475
1480
1485
1490
1495
1500
1505
1510
1515
1520
1525
1530
1535
1540
1545
1550
1555
1560
1565
1570
1575
1580
1585
1590
1595
1600
1605
1610
1615
1620
1625
1630
1635
1640
1645
1650
1655
1660
1665
1670
1675
1680
1685
1690
1695
1700
1705
1710
1715
1720
1725
1730
1735
1740
1745
1750
1755
1760
1765
1770
1775
1780
1785
1790
1795
1800
1805
1810
1815
1820
1825
1830
1835
1840
1845
1850
1855
1860
1865
1870
1875
1880
1885
1890
1895
1900
1905
1910
1915
1920
1925
1930
1935
1940
1945
1950
1955
1960
1965
1970
1975
1980
1985
1990
1995
2000
2005
2010
2015
2020
2025
2030
2035
2040
2045
2050
2055
2060
2065
2070
2075
2080
2085
2090
2095
2100
2105
2110
2115
2120
2125
2130
2135
2140
2145
2150
2155
2160
2165
2170
2175
2180
2185
2190
2195
2200
2205
2210
2215
2220
2225
2230
2235
2240
2245
2250
2255
2260
2265
2270
2275
2280
2285
2290
2295
2300
2305
2310
2315
2320
2325
2330
2335
2340
2345
2350
2355
2360
2365
2370
2375
2380
2385
2390
2395
2400
2405
2410
2415
2420
2425
2430
2435
2440
2445
2450
2455
2460
2465
2470
2475
2480
2485
2490
2495
2500
2505
2510
2515
2520
2525
2530
2535
2540
2545
2550
2555
2560
2565
2570
2575
2580
2585
2590
2595
2600
2605
2610
2615
2620
2625
2630
2635
2640
2645
2650
2655
2660
2665
2670
2675
2680
2685
2690
2695
2700
2705
2710
2715
2720
2725
2730
2735
2740
2745
2750
2755
2760
2765
2770
2775
2780
2785
2790
2795
2800
2805
2810
2815
2820
2825
2830
2835
2840
2845
2850
2855
2860
2865
2870
2875
2880
2885
2890
2895
2900
2905
2910
2915
2920
2925
2930
2935
2940
2945
2950
2955
2960
2965
2970
2975
2980
2985
2990
2995
3000
3005
3010
3015
3020
3025
3030
3035
3040
3045
3050
3055
3060
3065
3070
3075
3080
3085
3090
3095
3100
3105
3110
3115
3120
3125
3130
3135
3140
3145
3150
3155
3160
3165
3170
3175
3180
3185
3190
3195
3200
3205
3210
3215
3220
3225
3230
3235
3240
3245
3250
3255
3260
3265
3270
3275
3280
3285
3290
3295
3300
3305
3310
3315
3320
3325
3330
3335
3340
3345
3350
3355
3360
3365
3370
3375
3380
3385
3390
3395
3400
3405
3410
3415
3420
3425
3430
3435
3440
3445
3450
3455
3460
3465
3470
3475
3480
3485
3490
3495
3500
3505
3510
3515
3520
3525
3530
3535
3540
3545
3550
3555
3560
3565
3570
3575
3580
3585
3590
3595
3600
3605
3610
3615
3620
3625
3630
3635
3640
3645
3650
3655
3660
3665
3670
3675
3680
3685
3690
3695
3700
3705
3710
3715
3720
3725
3730
3735
3740
3745
3750
3755
3760
3765
3770
3775
3780
3785
3790
3795
3800
3805
3810
3815
3820
3825
3830
3835
3840
3845
3850
3855
3860
3865
3870
3875
3880
3885
3890
3895
3900
3905
3910
3915
3920
3925
3930
3935
3940
3945
3950
3955
3960
3965
3970
3975
3980
3985
3990
3995
4000
4005
4010
4015
4020
4025
4030
4035
4040
4045
4050
4055
4060
4065
4070
4075
4080
4085
4090
4095
4100
4105
4110
4115
4120
4125
4130
4135
4140
4145
4150
4155
4160
4165
4170
4175
4180
4185
4190
4195
4200
4205
4210
4215
4220
4225
4230
4235
4240
4245
4250
4255
4260
4265
4270
4275
4280
4285
4290
4295
4300
4305
4310
4315
4320
4325
4330
4335
4340
4345
4350
4355
4360
4365
4370
4375
4380
4385
4390
4395
4400
4405
4410
4415
4420
4425
4430
4435
4440
4445
4450
4455
4460
4465
4470
4475
4480
4485
4490
4495
4500
4505
4510
4515
4520
4525
4530
4535
4540
4545
4550
4555
4560
4565
4570
4575
4580
4585
4590
4595
4600
4605
4610
4615
4620
4625
4630
4635
4640
4645
4650
4655
4660
4665
4670
4675
4680
4685
4690
4695
4700
4705
4710
4715
4720
4725
4730
4735
4740
4745
4750
4755
4760
4765
4770
4775
4780
4785
4790
4795
4800
4805
4810
4815
4820
4825
4830
4835
4840
4845
4850
4855
4860
4865
4870
4875
4880
4885
4890
4895
4900
4905
4910
4915
4920
4925
4930
4935
4940
4945
4950
4955
4960
4965
4970
4975
4980
4985
4990
4995
5000
5005
5010
5015
5020
5025
5030
5035
5040
5045
5050
5055
5060
5065
5070
5075
5080
5085
5090
5095
5100
5105
5110
5115
5120
5125
5130
5135
5140
5145
5150
5155
5160
5165
5170
5175
5180
5185
5190
5195
5200
5205
5210
5215
5220
5225
5230
5235
5240
5245
5250
5255
5260
5265
5270
5275
5280
5285
5290
5295
5300
5305
5310
5315
5320
5325
5330
5335
5340
5345
5350
5355
5360
5365
5370
5375
5380
5385
5390
5395
5400
5405
5410
5415
5420
5425
5430
5435
5440
5445
5450
5455
5460
5465
5470
5475
5480
5485
5490
5495
5500
5505
5510
5515
5520
5525
5530
5535
5540
5545
5550
5555
5560
5565
5570
5575
5580
5585
5590
5595
5600
5605
5610
5615
5620
5625
5630
5635
5640
5645
5650
5655
5660
5665
5670
5675
5680
5685
5690
5695
5700
5705
5710
5715
5720
5725
5730
5735
5740
5745
5750
5755
5760
5765
5770
5775
5780
5785
5790
5795
5800
5805
5810
5815
5820
5825
5830
5835
5840
5845
5850
5855
5860
5865
5870
5875
5880
5885
5890
5895
5900
5905
5910
5915
5920
5925
5930
5935
5940
5945
5950
5955
5960
5965
5970
5975
5980
5985
5990
5995
6000
6005
6010
6015
6020
6025
6030
6035
6040
6045
6050
6055
6060
6065
6070
6075
6080
6085
6090
6095
6100
6105
6110
6115
6120
6125
6130
6135
6140
6145
6150
6155
6160
6165
6170
6175
6180
6185
6190
6195
6200
6205
6210
6215
6220
6225
6230
6235
6240
6245
6250
6255
6260
6265
6270
6275
6280
6285
6290
6295
6300
6305
6310
6315
6320
6325
6330
6335
6340
6345
6350
6355
6360
6365
6370
6375
6380
6385
6390
6395
6400
6405
6410
6415
6420
6425
6430
6435
6440
6445
6450
6455
6460
6465
6470
6475
6480
6485
6490
6495
6500
6505
6510
6515
6520
6525
6530
6535
6540
6545
6550
6555
6560
6565
6570
6575
6580
6585
6590
6595
6600
6605
6610
6615
6620
6625
6630
6635
6640
6645
6650
6655
6660
6665
6670
6675
6680
6685
6690
6695
6700
6705
6710
6715
6720
6725
6730
6735
6740
6745
6750
6755
6760
6765
6770
6775
6780
6785
6790
6795
6800
6805
6810
6815
6820
6825
6830
6835
6840
6845
6850
6855
6860
6865
6870
6875
6880
6885
6890
6895
6900
6905
6910
6915
6920
6925
6930
6935
6940
6945
6950
6955
6960
6965
6970
6975
6980
6985
6990
6995
7000
7005
7010
7015
7020
7025
7030
7035
7040
7045
7050
7055
7060
7065
7070
7075
7080
7085
7090
7095
7100
7105
7110
7115
7120
7125
7130
7135
7140
7145
7150
7155
7160
7165
7170
7175
7180
7185
7190
7195
7200
7205
7210
7215
7220
7225
7230
7235
7240
7245
7250
7255
7260
7265
7270
7275
7280
7285
7290
7295
7300
7305
7310
7315
7320
7325
7330
7335
7340
7345
7350
7355
7360
7365
7370
7375
7380
7385
7390
7395
7400
7405
7410
7415
7420
7425
7430
7435
7440
7445
7450
7455
7460
7465
7470
7475
7480
7485
7490
7495
7500
7505
7510
7515
7520
7525
7530
7535
7540
7545
7550
7555
7560
7565
7570
7575
7580
7585
7590
7595
7600
7605
7610
7615
7620
7625
7630
7635
7640
7645
7650
7655
7660
7665
7670
7675
7680
7685
7690
7695
7700
7705
7710
7715
7720
7725
7730
7735
7740
7745
7750
7755
7760
7765
7770
7775
7780
7785
7790
7795
7800
7805
7810
7815
7820
7825
7830
7835
7840
7845
7850
7855
7860
7865
7870
7875
7880
7885
7890
7895
7900
7905
7910
7915
7920
7925
7930
7935
7940
7945
7950
7955
7960
7965
7970
7975
7980
7985
7990
7995
8000
8005
8010
8015
8020
8025
8030
8035
8040
8045
8050
8055
8060
8065
8070
8075
8080
8085
8090
8095
8100
8105
8110
8115
8120
8125
8130
8135
8140
8145
8150
8155
8160
8165
8170
8175
8180
8185
8190
8195
8200
8205
8210
8215
8220
8225
8230
8235
8240
8245
8250
8255
8260
8265
8270
8275
8280
8285
8290
8295
8300
8305
8310
8315
8320
8325
8330
8335
8340
8345
8350
8355
8360
8365
8370
8375
8380
8385
8390
8395
8400
8405
8410
8415
8420
8425
8430
8435
8440
8445
8450
8455
8460
8465
8470
8475
8480
8485
8490
8495
8500
8505
8510
8515
8520
8525
8530
8535
8540
8545
8550
8555
8560
8565
8570
8575
8580
8585
8590
8595
8600
8605
8610
8615
8620
8625
8630
8635
8640
8645
8650
8655
8660
8665
8670
8675
8680
8685
8690
8695
8700
8705
8710
8715
8720
8725
8730
8735
8740
8745
8750
8755
8760
8765
8770
8775
8780
8785
8790
8795
8800
8805
8810
8815
8820
8825
8830
8835
8840
8845
8850
8855
8860
8865
8870
8875
8880
8885
8890
8895
8900
8905
8910
8915
8920
8925
8930
8935
8940
8945
8950
8955
8960
8965
8970
8975
8980
8985
8990
8995
9000
9005
9010
9015
9020
9025
9030
9035
9040
9045
9050
9055
9060
9065
9070
9075
9080
9085
9090
9095
9100
9105
9110
9115
9120
9125
9130
9135
9140
9145
9150
9155
9160
9165
9170
9175
9180
9185
9190
9195
9200
9205
9210
9215
9220
9225
9230
9235
9240
9245
9250
9255
9260
9265
9270
9275
9280
9285
9290
9295
9300
9305
9310
9315
9320
9325
9330
9335
9340
9345
9350
9355
9360
9365
9370
9375
9380
9385
9390
9395
9400
9405
9410
9415
9420
9425
9430
9435
9440
9445
9450
9455
9460
9465
9470
9475
9480
9485
9490
9495
9500
9505
9510
9515
9520
9525
9530
9535
9540
9545
9550
9555
9560
9565
9570
9575
9580
9585
9590
9595
9600
9605
9610
9615
9620
9625
9630
9635
9640
9645
9650
9655
9660
9665
9670
9675
9680
9685
9690
9695
9700
9705
9710
9715
9720
9725
9730
9735
9740
9745
9750
9755
9760
9765
9770
9775
9780
9785
9790
9795
9800
9805
9810
9815
9820
9825
9830
9835
9840
9845
9850
9855
9860
9865
9870
9875
9880
9885
9890
9895
9900
9905
9910
9915
9920
9925
9930
9935
9940
9945
9950
9955
9960
9965
9970
9975
9980
9985
9990
9995
10000
10005
10010
10015
10020
10025
10030
10035
10040
10045
10050
10055
10060
10065
10070
10075
10080
10085
10090
10095
10100
10105
10110
10115
10120
10125
10130
10135
10140
10145

In this case, the emulator would generally respond with an error message indicating that it is unable to process a request to store the transmitted data since the "disk drive number 4" has been reached in error. Alternatively, the emulated device may simply not respond at all, at which time the host device would generally "time out" while waiting for a response.

5 In a preferred embodiment, deployment of a power data line between the host device and emulator enables emulation of a selected device within the emulator during transient power conditions to be emulated by the inventive system. The inventive approach preferably enables the host device to monitor data traffic on the data communication line occurring during simulated power-up or power-down of the emulator. Appropriate effects on the data communication line caused by power-up and power-down conditions within the emulator are preferably implemented by software included in the emulator. Producing appropriate effects and/or disturbances in the data communication line in response to power cycling conditions preferably enables the host computer to fully exercise diagnostic and recovery operations implemented in the code within the host device. In this manner, the features of the host system may preferably be more fully exercised than when employing systems of the prior art. 15 Moreover, the emulator may be used in such a way as to permit emulation of dynamic connection and disconnection of a peripheral device where the behavior of the pertinent peripheral device under transient power conditions is known. The practice of peripheral device dynamic connection and disconnection is referred to herein as "hot plug" operation.

20 Accordingly, it is an advantage of a preferred embodiment of the present invention that the host device is able to monitor and establish the control and power settings for an emulated device employing control and power connection lines of the present invention.

25 It is a further advantage of a preferred embodiment of the present invention that diagnostic and recovery functionality within the host device may be more fully exercised than in prior art systems.

It is a still further advantage of a preferred embodiment of the present invention that dynamic connection and disconnection of peripheral devices to a host device may be

practiced employing information pertaining to transient power characteristics of various peripheral devices.

The foregoing has outlined rather broadly the features and technical advantages of the present invention in order that the detailed description of the invention that follows may be better understood. Additional features and advantages of the invention will be described hereinafter which form the subject of the claims of the invention. It should be appreciated by those skilled in the art that the conception and specific embodiment disclosed may be readily utilized as a basis for modifying or designing other structures for carrying out the same purposes of the present invention. It should also be realized by those skilled in the art that such equivalent constructions do not depart from the spirit and scope of the invention as set forth in the appended claims. The novel features which are believed to be characteristic of the invention, both as to its organization and method of operation, together with further objects and advantages will be better understood from the following description when considered in connection with the accompanying figures. It is to be expressly understood, however, that each of the figures is provided for the purpose of illustration and description only and is not intended as a definition of the limits of the present invention.

BRIEF DESCRIPTION OF THE DRAWING

For a more complete understanding of the present invention, reference is now made to the following descriptions taken in conjunction with the accompanying drawing, in which:

FIGURE 1 depicts apparatus for conducting emulation of a peripheral device according to a prior art solution;

FIGURE 2 depicts apparatus for connecting a host device to an emulator according to a preferred embodiment of the present invention;

FIGURE 3 is a block diagram representing interaction between various software elements according to a preferred embodiment of the present invention;

FIGURE 4 depicts apparatus for use in interfacing an emulator to a host device according to a preferred embodiment of the present invention;

FIGURE 5 depicts a control interface connection between a host device and an emulator according to a preferred embodiment of the present invention;

FIGURE 6 depicts an example of logic flow during a device emulation according to a preferred embodiment of the present invention; and

FIGURE 7 depicts computer apparatus adaptable for use with a preferred embodiment of the present invention.

DETAILED DESCRIPTION

FIGURE 2 depicts an apparatus for connecting a host device to an emulator according to a preferred embodiment of the present invention. The embodiment of FIGURE 2 preferably operates to enable more accurate emulation of various peripheral devices emulated by emulator 202 than was possible employing the systems of the prior art. This more accurate emulation is preferably made possible by more accurately representing the physical interface between the host device 201 and a hypothetical peripheral device by employing a plurality of connection lines between the host device 201 and emulator 202. Although the embodiment of FIGURE 2 depicts three such connection lines, it will be appreciated that fewer or more than three such connection lines may be employed, and that all such variations are included within the scope of the present invention. Although the following discussion generally concerns an embodiment in which host device 201 is connected to a single emulator 202, where emulator 202 emulates a single device, it will be appreciated that multiple emulators may be connected to host device 201, and multiple peripheral devices could be emulated by any single emulator, and all such variations are included in the scope of the present invention.

In a preferred embodiment, user data line 203 preferably provides bi-directional data communication between host device or host computer 201 and emulator 202. In addition to user data line 203, the embodiment of FIGURE 2 preferably provides control data line 204 and power data line 205. It will be appreciated that one or more of each of user data line 203, control data line 204, and power data line 205 may be implemented. Moreover, the present invention may incorporate connection lines for purposes other than those described in connection with lines 203, 204, and 205.

A plurality of different devices and device types may be emulated by emulator 202, including, but not limited to, disk drives, tape drives, other storage media, input/output (I/O) devices, processors, fans and other electro-mechanical components preferably having data interfaces. Preferably, a common set of data, control, and power data lines may be employed between host device 201 and emulator 202 for the purpose of emulating a range of different

physical devices. Each emulation process will preferably involve deploying software within both host device 201 and emulator 202 appropriately suited to the device being emulated. For example, the behavior profiles of an I/O device and a hard disk drive during power-up and power-down conditions may vary. Software implemented in the emulator for these two cases of emulation preferably accurately reflects the behavior of the devices being emulated under their respective actual operating conditions.

In a preferred embodiment, control data line 204 may be employed to control settings including but not limited to: designation of address destinations, identification of address locations as well as data interface lines employed to enable the interface. For example, host device 201 may transmit a data location identifier to emulator 202 along control data line 204 which preferably remains active throughout a particular emulation session unless modified by host device 201. Establishing such a setting may cause changes in the operation of one or more of the other lines 203 and 205 connecting host device 201 and emulator 202.

For example, where emulator 202 emulates a disk drive, host device 201 may transmit a message along control data line 204 to designate the emulated disk drive as disk drive number 4. Continuing with the example, a data message is subsequently transmitted along user data line 203 from host device 201 to emulator 202 within a data packet indicating that the intended destination address for the data is disk drive number 5. In this case, emulation software within emulator 202 preferably does not store the data and may optionally return an error condition to the host device 201. Alternatively, the emulation software may simply not respond at all, thereby causing a time-out condition in host device 201. In this example, it may be seen that messages transmitted along control data line 204 may affect communication occurring along user data line 203. Whether the emulator's response is to send an error message or to not respond at all, the operation of the host device in response to an improperly directed message, in the emulation environment, may be fully exercised. The response of host device 201 may include execution of diagnostic and/or recovery code.

In a preferred embodiment, power data line 205 may include a range of operations, depending upon which device is being emulated. Generally, emulator 202 receives its actual operating power independently of power data line 205. Thus, in a preferred embodiment, power data line 205 is generally not employed to supply operating power to emulator 202. Rather, power data line 205 is preferably a data communication line which transmits data which emulates various power data line conditions for a device being emulated by emulator 202. It will be appreciated that some of the devices being emulated may ordinarily receive their power from host device 201, while others may be powered independently of host device 201 but conduct data and control data line communication with host device 201.

For example, where emulator 202 is emulating a device normally powered by host device 201, host device 201 preferably transmits data messages along power data line 205 which represent power levels for the emulated device. During steady state operation, host device 205 may transmit a power value to emulator 202 representing a power value to be supplied to the emulated device. Upon receipt of this power value, software within emulator 202 preferably operates to establish the transmitted power value as the operating power level for the emulated device. The emulated behavior of the device preferably responds to the established power value according to the characteristics of the emulation program within emulator 202. Under more complex power cycling conditions, a series of power values, which may vary rapidly as a function of time, are preferably transmitted from host device 201 to emulator 202 for input to an appropriate program running within emulator 202. As is the case with a steady state power value, the operation of the emulated device then preferably follows the characteristics of the emulated device incorporated into the emulation program within emulator 202.

In a preferred embodiment, the software in emulator 202 also preferably accurately emulates the effects on user data line 203 and control data line 204 of transient power conditions on power data line 205. For example, where the presence of transient power conditions on power data line 205 would normally cause random or "noise" data to appear on a peripheral device data communication line, emulator 202 software preferably causes such

data to appear on user data line 203 to accurately represent the operation of the device being emulated. The above example illustrates but one example of the effect of one communication line upon another, in this case, an effect of a power state upon user data line 203. It will be appreciated that many other such interrelationships may exist between the data transmitted along communication lines 203-205.

A more limited operation of power data line 205 may include merely sensing the presence or absence of a device at the emulator 202 end of power data line 205. This more limited operation of power data line 205 may be employed where the peripheral device being emulated is powered by a source independent of host device 201. While the above discussion concerns an arrangement in which host device 201 supplies data along power data line 205 to emulator 202, which represents power values. In an alternative embodiment, host device 201 could supply actual operating power to emulator 202.

In a preferred embodiment, host device 201 and emulator 202 may each be any one of a number of intelligent processing devices. The operations of host device 201 may be performed by a personal computer but, alternatively, may be performed by any one of a number other computing devices. Likewise, emulator 202 may be a personal computer, but could also be any one of number of other computing devices having appropriate processing power and one or more data communication interfaces for communication with host device 201. It will be appreciated that host device 201 and/or emulator 202 may comprise more than one data processing device, and all such variations are included within the scope of the present invention.

FIGURE 3 is a block diagram 300 representing interaction between various software functions according to a preferred embodiment of the present invention. It will be appreciated that fewer or more operational software blocks could be included in the emulation of a peripheral device by a host device, and all such variations are included in the scope of the present invention.

In a preferred embodiment, program code is implemented which includes the various functional blocks depicted in FIGURE 3. Herein, "host software" generally refers to

software implemented within host device 201 (FIGURE 2) and "emulator software" generally refers to software implemented within emulator 202 (FIGURE 2) for emulating the operation of a selected peripheral device and interacting with communication interfaces between emulator 202 and host device 201.

5 In a preferred embodiment, host software includes main code 301 which operates user data line 203, control data line 204, and power data line 205 communication with emulator 202. Where appropriate, main code 301 may call diagnostic code 302 and/or recovery code 303. Diagnostic code 302 is preferably executed when a fault condition is indicated in order to determine a cause of such fault. Where beneficial, recovery code 303 may be called to correct errors or problems caused by a fault condition or other cause. The arrows between functional blocks in FIGURE 3 generally indicate the availability of bi-directional communication between such blocks. Generally, each block at an end of a bi-directional arrow is able to influence the operation of the block at the other end of the arrow.

10 In a preferred embodiment, emulator software preferably includes code for executing operations associated with each of user data line 203, control data line 204, and power data line 205, designated respectively, as user data line code 305, control data line code 306, and power data line code 307. In each case, blocks 305-307 preferably operate to execute operations associated with data, both incoming and outgoing, with their respective communication lines. Preferably, general operational code 304 executes functions
15 representing the general operation of a device being emulated by emulator 202 (FIGURE 2). The features of general operational code 304 will preferably vary depending upon the device being emulated.

20 FIGURE 4 depicts an apparatus for use in interfacing an emulator to a host device according to a preferred embodiment of the present invention. FIGURE 4 includes some of the same features depicted in FIGURE 2, such as host device 201, emulator 202, and the data, control, and power data lines. However, FIGURE 4 depicts certain preferred interfacing components for implementing the inventive set of connections between host device 201 and emulator (or, target mode emulator) 202. In a preferred embodiment, host
25

device 201 may be implemented as part of a high availability storage system. Alternatively, host device 201 may be associated with a number of other data processing applications.

In a preferred embodiment, host device 201 includes a controller host bus adapter (HBA) 401 for interfacing with user data line 203 and a control/power interface 402 for interfacing host device 201 with control data line 204 and power data line 205. Generally, each of user data line 203, control data line 204, and power data line 205 may include a plurality of physical wires. One possible implementation of control/power interface 402 would involve deployment of a general purpose interface card (GPIO card). Alternatively, a number of other interface cards, either general purpose or custom, may be employed, and all such variations are included within the scope of the present invention.

In a preferred embodiment, controller HBA 401 of host device 201 transmits data along user data line 203 to emulator data interface port 403 of emulator 202. Separately, control/power interface 402 of host device 201 preferably conducts communication along control data line 204 and power data line 205 with emulator control/power interface 404 within emulator 202. While the embodiment of FIGURE 3 is shown employing a single device in each of host device 201 and emulator 202 for interfacing each of the devices with control data line 204 and power data line 205, it will be appreciated that an alternative embodiment could employ a separate interface in each of the host device 201 and emulator 202 for interacting with each of control data line 204 and power data line 205.

In a preferred embodiment, data received at emulator data interface port 403 and emulator control/power interface 404 is fed into the "command and control processing" functional block 405. Preferably, software operation within command and control processing block 405 performs operations employing data received from interfaces 403 and 404 and generates responses to be transmitted back toward host device 201 along user data lines 203 and control data line 204. Although the preferred embodiment depicted in FIGURE 3 depicts uni-directional communication from host device 201 to emulator 202 for power data line 205, an alternative embodiment of the present invention could deploy bi-directional communication along power data line 205.

In a preferred embodiment of the present invention, manipulation of data on the control data line may be beneficially employed to emulate the attachment of peripheral devices to different ports on host device 201. Specifically, an address for a device being emulated may be initially established to correspond to a first port by sending appropriate data along control data line 204. Once testing of the emulated device at the first port is completed, the host device may establish new address data corresponding to a second port connection for the device being emulated by transmitting appropriate data along control data line 204 to emulator 202. By repeating this process, host device 201 is preferably able to conduct several tests of a particular emulated device, with the emulated device having a different emulated port connection for each test.

The above-described approach thereby preferably enables efficient, rapid, and programmable modification of emulated peripheral device attachment to the host device. Preferably, when changing port connections for a particular emulated peripheral device, physical removal and re-attachment of the peripheral device to the host device is preferably also emulated. This removal and re-attachment may be emulated by transmitting appropriately adjusted power values from host device 201 to emulator 202 to reflect the loss and subsequent restoration of power to the peripheral device.

FIGURE 5 depicts a control interface connection between host device 201 and emulator 202 according to a preferred embodiment of the present invention. FIGURE 5 depicts one possible selection of control interface connections which may be implemented within control data line 204 and power data line 205 (FIGURE 2). It will be appreciated that fewer or more connections may be established, and that connections other than those shown in FIGURE 5 may be implemented within control data line 204, and all such variations are included within the scope of the present invention.

In a preferred embodiment, ID select lines 0-4 501 are interface lines which establish address values for a device being emulated. Communication along ID select lines 501 is generally uni-directional from host device 201 to the emulator 202. However, in an alternative embodiment, ID select lines 501 could conduct bi-directional communication.

DIE 0 and DIE 1 are preferably data interface enable lines 502 and preferably conduct uni-directional communication from emulator 202 to host device 501. FD or fault detect line 503 preferably conducts uni-directional communication from emulator 202 to host device 201.

In a preferred embodiment, motor control data lines 504, or MC0 and MC1, conduct
5 uni-directional communication from host device 201 to emulator 202. Where, for example, the device being emulated is a disk drive, motor control data lines 504 preferably enable host device 201 to activate or deactivate the motors within the disk drives. Since running the motors within disk drives consumes a significant amount of energy, and selected disk drives are not continuously in use, substantial energy savings may be obtained by turning off the motors in selected drives when the drives are not in use. Power supply lines 505, or PS0 and
10 PS1, preferably support uni-directional communication from host device 201 to emulator 202. Power supply lines or power supply detection lines 505 may be employed to indicate to host device 201 whether emulator 202 is connected to and/or available to host device 201.

Where the device being emulated is a disk drive or storage mechanism having an
15 active communication interface, various types of communication may be conducted. One basic type of communication involves user data actually stored on a disk within the disk drive. In order for host device 201 to retrieve this type of data from a disk drive, or emulated disk drive, the disk drive motor should be spinning. Thus, certain steps are generally pursued, such as issuing a command along control data line 204 to turn on the disk drive
20 motor in order to retrieve the data stored on the disk itself. Other data may be retrieved from a disk drive or other storage device which does not require that the disk drive motor be spinning. For example, communication pertaining to the identity and status of the drive, which is generally independent of data stored on the drive, may preferably be conducted between host device 201 and the disk drive without activating the disk drive motor.
25 Accordingly, the features of the control data line communication between host device 201 and emulator 202 (which may emulate a wide range of devices) are preferably adjusted to suit the characteristics of the device being emulated.

FIGURE 6 depicts an example of logic flow during a device emulation according to a preferred embodiment of the present invention. The logic flow depicted in FIGURE 6 generally assumes that the device being emulated has a motor or other analogous active electro-mechanical device. Reference may be made to FIGURE 2 in connection with the mention of host device 201 and emulator 202.

In a preferred embodiment, an exchange of information may be initiated by sending a request for information from host device 201 to emulator 202, in step 601. Execution of this step generally requires that emulator 202 (which may be a target mode emulator) is turned on and connected to host device 201.

At step 201, host device 201 preferably determines whether a data interface on emulator 202 is enabled by checking DIE lines 502 (FIGURE 5). If the data interface is not enabled, generally no response will be provided by host 201, as indicated in step 606. If the data interface is enabled, host device 201 preferably determines whether emulator 202 is available and connected by checking power supply detection line 505. If emulator 202 is not available, a response will generally not be provided by host device 201, as indicated in step 606. If emulator 202 is available, the host device preferably proceeds to determine the identity of the device being emulated.

At step 604, the host device preferably determines whether the emulated device with which it is communicating is the correct device. This determination may be made by retrieving an address from the emulated device and comparing this retrieved address with an address at which host device 201 expected the emulated device to be located. If the wrong device is in communication with the host device, a response by host device 201 will generally not be provided, as indicated in step 606.

If the correct device is being addressed by host device 201, the inventive mechanism then determines whether host device 201 seeks user data or product identification information. (Herein, "user data" generally refers to data stored on a hard disk drive or other storage device as opposed to overhead data which describes the identity and location of the disk drive or other emulated device). If the requested information in product information,

which generally does not require activating a disk drive motor or otherwise delving into user data storage within an emulated storage device, then the product information is returned to host device 201 at step 608. If the requested information is user data, the inventive mechanism then determines the status of the disk drive or other storage device motor at step 607. In an emulation environment, the status of the "motor" or storage device active mechanism is generally a bit or flag established by software operating within emulator 202 as opposed to a condition of an actual physical device.

If the storage device active mechanism or motor is running, emulator 202 preferably acquires the data from the disk or other storage format and transmits this acquired data to host device 201 in step 608. If the storage device active mechanism or motor is not running, in step 607, emulator 202 preferably transmits a "not ready" signal to host device 201 in step 609 to indicate that it is not currently able to satisfy the request for data initiated in step 601. In the above, the responses to host device 201 from emulator 202 are generally handled by the command and control processing functional block 405 (FIGURE 4) within emulator 202.

FIGURE 7 illustrates computer system 700 adaptable for use with a preferred embodiment of the present invention. Central processing unit (CPU) 701 is coupled to system bus 702. CPU 701 may be any general purpose CPU, such as an HP PA-8200. However, the present invention is not restricted by the architecture of CPU 701 as long as CPU 701 supports the inventive operations as described herein. Bus 702 is coupled to random access memory (RAM) 703, which may be SRAM, DRAM, or SDRAM. ROM 704 is also coupled to bus 702, which may be PROM, EPROM, or EEPROM. RAM 703 and ROM 704 hold user and system data and programs as is well known in the art.

Bus 702 is also coupled to input/output (I/O) adapter 705, communications adapter card 711, user interface adapter 708, and display adapter 709. I/O adapter 705 connects to storage devices 706, such as one or more of hard drive, CD drive, floppy disk drive, tape drive, to the computer system. Communications adapter 711 is adapted to couple computer system 700 to network 712, which may be one or more of local (LAN), wide-area (WAN), Ethernet or Internet network. User interface adapter 708 couples user input devices, such as

keyboard 713 and pointing device 707, to computer system 700. Display adapter 709 is driven by CPU 701 to control the display on display device 710.

Although the present invention and its advantages have been described in detail, it should be understood that various changes, substitutions and alterations can be made herein without departing from the spirit and scope of the invention as defined by the appended claims. Moreover, the scope of the present application is not intended to be limited to the particular embodiments of the process, machine, manufacture, composition of matter, means, methods and steps described in the specification. As one of ordinary skill in the art will readily appreciate from the disclosure of the present invention, processes, machines, manufacture, compositions of matter, means, methods, or steps, presently existing or later to be developed that perform substantially the same function or achieve substantially the same result as the corresponding embodiments described herein may be utilized according to the present invention. Accordingly, the appended claims are intended to include within their scope such processes, machines, manufacture, compositions of matter, means, methods, or steps.

WHAT IS CLAIMED IS:

1. A method for emulating an operation of a dynamically reconfigurable computer system, the method comprising the steps of:
- providing operational data communication between a host device and an emulator;
- and
- employing said provided operational data to control an operation of an emulated device at said emulator.
2. The method of claim 1 further comprising the step of:
- providing user data communication between said host device and said emulator.
3. The method of claim 2 wherein said step of providing operational data comprises the step of:
- establishing a power level for said operation of said emulated device.
4. The method of claim 3 further comprising the step of:
- adjusting the operation of said emulated device according to said established power level.
5. The method of claim 4 wherein said adjusting step comprises the step of:
- adjusting said provision of user data communication between said host device and said emulator according to said established power level.

6. The method of claim 3 wherein said step of providing operational data comprises:

dynamically modifying said established power level to emulate one of a connection and a disconnection of a power attachment for said emulated device.

7. The method of claim 6 further comprising the step of:
continuously adjusting the operation of said emulated device based upon said dynamically modified established power level.

8. The method of claim 7 wherein said continuously adjusting step comprises the step of:

discontinuing provision of user data communication when upon occurrence of said disconnection of said power attachment to said emulated device.

9. The method of claim 1 wherein said step of providing operational data communication comprises the step of:

establishing an address at said host device to which said emulated device is connected.

10. The method of claim 9 wherein said step of providing operational data communication comprises:

modifying said established address at said host device to which said emulated device is connected.

11. The method of claim 1 wherein said step of providing operational data communication comprises the step of:

providing a fault detect signal to said host device to indicate a fault condition within said emulated device.

12. The method of claim 1 wherein said step of providing operational data communication comprises the step of:

dynamically detecting a connection of said emulator to said host device.

13. The method of claim 1 wherein said step of providing operational data communication comprises the step of:

enabling control at least one component within said emulated device by said host device.

14. A system for emulating an operation of a peripheral device, the system comprising:

a host device;

an emulator connected to said host device; and

at least one control data line deployed between said host device and said emulator.

15. The system of claim 14 further comprising:

at least one power data line deployed between said host device and said emulator.

16. The system of claim 15 wherein said at least one power line comprises:
a power supply line for dynamically detecting a connection of said emulator to said
host device.

17. The system of claim 14 wherein said at least one control line comprises:
a motor control line for activating a component within a device emulated by said
emulator.

18. A computer program product having a computer readable medium having
computer program logic recorded thereon for emulating an operation of a dynamically
reconfigurable computer system, the computer program product comprising:

code for providing operational data communication between a host device and an
emulator;

code for employing said provided operational data to control an operation of an
emulated device at said emulator; and

code for conducting user data communication between said host device and said
emulator in accordance with contents of said operational data.

19. The computer program product of claim 18 wherein said code for providing
operational data comprises:

code for establishing a power level for said operation of said emulated device.

20. The computer program product of claim 19 wherein said code for providing
operational data comprises:

code for dynamically modifying said established power level to emulate one of a connection and a disconnection of a power attachment to said emulated device.

2025-11-19 14:00:00

EMULATION OF DYNAMICALLY RECONFIGURABLE COMPUTER SYSTEM

ABSTRACT OF THE DISCLOSURE

5 The present invention relates to a system and method for emulating a greater range of behavior of a peripheral device connected to a host device or host computer than was available in the prior art. The emulation of a greater range of activity of the peripheral device provides an opportunity to more fully test the interaction of a host device with the emulated peripheral device. More specifically, the present invention preferably adds control data line and power data line connections to user data line connections between the host device and an intelligent emulator so that variations in control settings and power levels may be exercised in addition to manipulation of transmissions along a user data line, thereby more fully exercising host device interaction with an emulated device.

FIG. 1
(PRIOR ART)

100

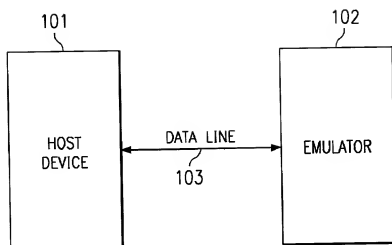


FIG. 2

200

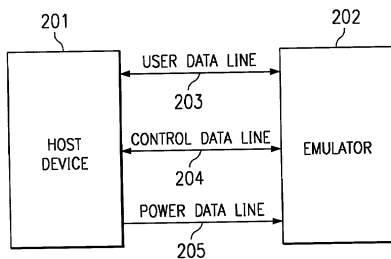


FIG. 3

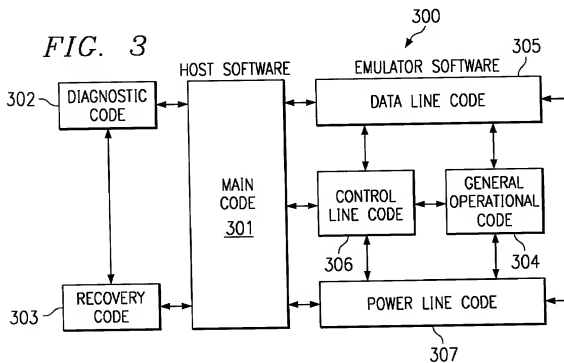


FIG. 4




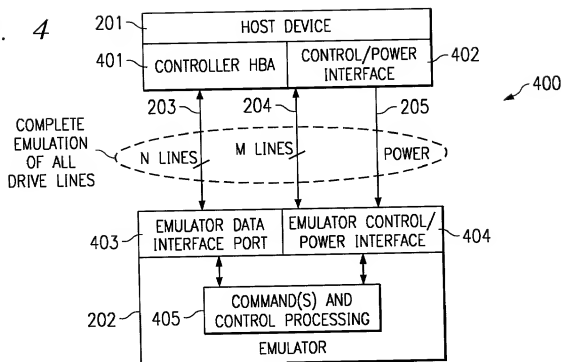


FIG. 5

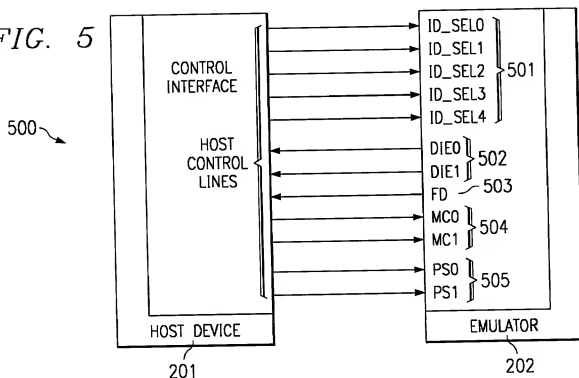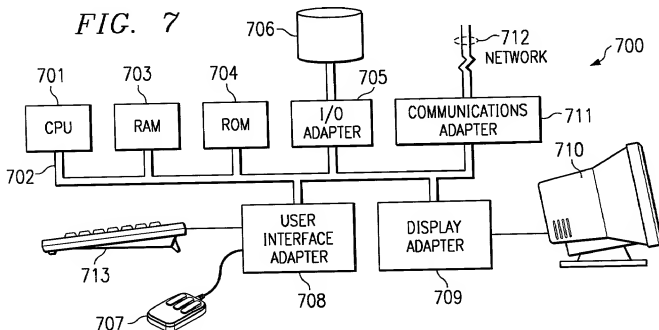

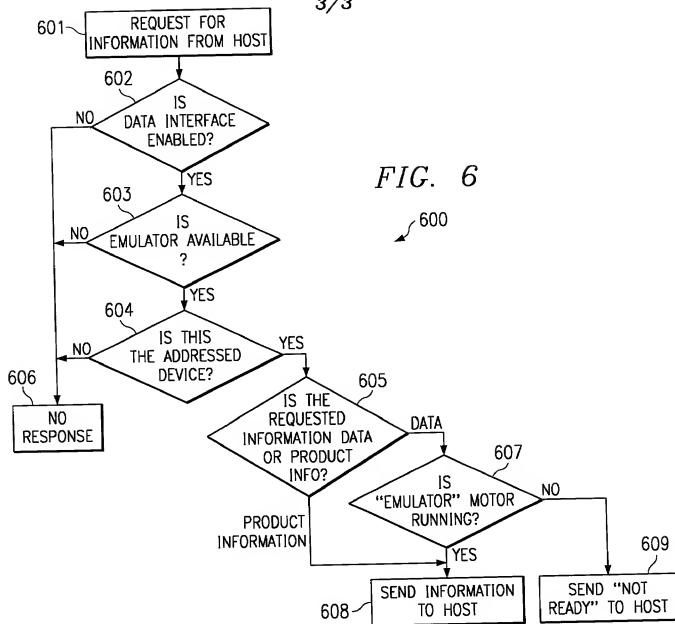

DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATIONATTORNEY DOCKET NO. 10002221-1

As a below named inventor, I hereby declare that:

My residence/post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Emulation Of Dynamically Reconfigurable Computer System

the specification of which is attached hereto unless the following box is checked:

() was filed on _____ as US Application Serial No. or PCT International Application
Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understood the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR 1.56.

Foreign Application(s) and/or Claim of Foreign Priority

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor(s) certificate listed below and have also identified below any foreign application for patent or inventor(s) certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NUMBER	DATE FILED	PRIORITY CLAIMED UNDER 35 U.S.C. 119
			YES: _____ NO: _____
			YES: _____ NO: _____

Provisional Application

I hereby claim the benefit under Title 35, United States Code Section 119(e) of any United States provisional application(s) listed below:

APPLICATION SERIAL NUMBER	FILING DATE

U. S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NUMBER	FILING DATE	STATUS (patented/pending/abandoned)

POWER OF ATTORNEY:

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Customer Number 022879Place Customer
Number Bar Code
Label hereSend Correspondence to:
HEWLETT-PACKARD COMPANY
Intellectual Property Administration
P.O. Box 272400
Fort Collins, Colorado 80528-9599**Direct Telephone Calls To:**Steven R. Ormiston
(208) 396-2544

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Inventor: Gordon MargulieuxCitizenship: USResidence: 2040 Interlachen Way, Meridian, ID 83642Post Office Address: Same as ResidenceInventor's Signature Gordon MargulieuxDate 9-20-2000